
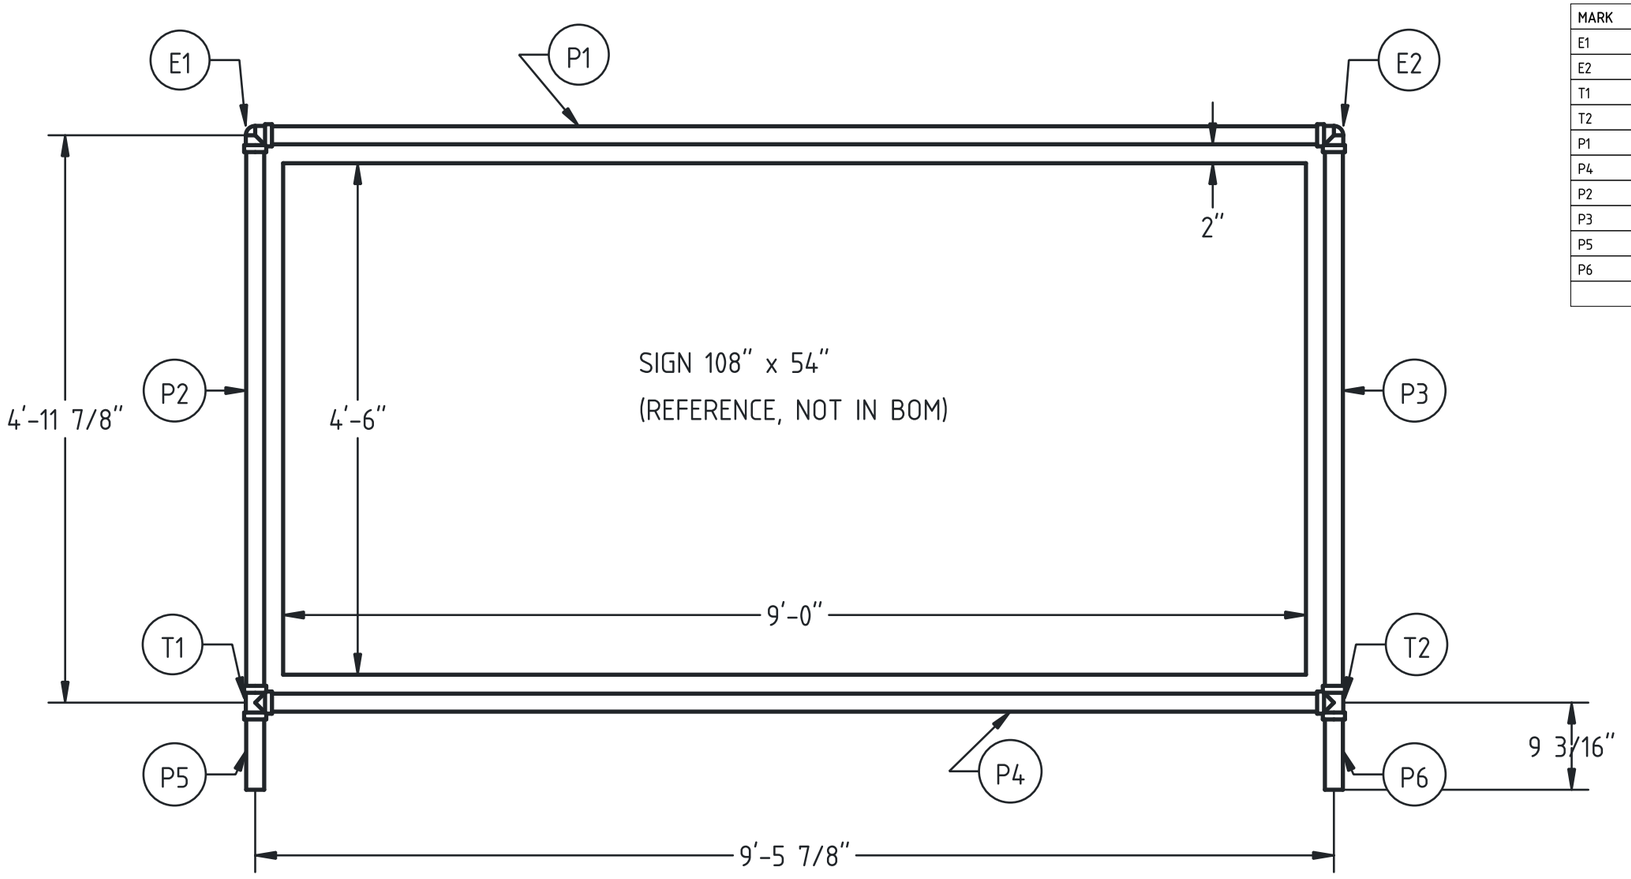


FRONT ELEVATION SCALE 3/4" = 1'-0" (1:16)

MARK	QTY	DESCRIPTION	CUT (PVC)	CUT (MODEL)
E1	1	ELL 90, 1-1/2" SCH-40 PVC SOCKET	-	-
E2	1	ELL 90, 1-1/2" SCH-40 PVC SOCKET	-	-
T1	1	TEE, 1-1/2" SCH-40 PVC SOCKET	-	-
T2	1	TEE, 1-1/2" SCH-40 PVC SOCKET	-	-
P1	1	PIPE 1-1/2" SCH-40 PVC, TOP RAIL	9'-3 7/8"	9'-3 3/8"
P4	1	PIPE 1-1/2" SCH-40 PVC, BOTTOM RAIL	9'-3 7/8"	9'-3 3/8"
P2	1	PIPE 1-1/2" SCH-40 PVC, LEFT POST	4'-9 7/8"	4'-9 3/8"
P3	1	PIPE 1-1/2" SCH-40 PVC, RIGHT POST	4'-9 7/8"	4'-9 3/8"
P5	1	PIPE 1-1/2" SCH-40 PVC, LEFT LEG	7 15/16"	7 15/16"
P6	1	PIPE 1-1/2" SCH-40 PVC, RIGHT LEG	7 15/16"	7 15/16"
		TOTAL PIPE 29.6 FT: BUY 3 x 10 FT STICKS		

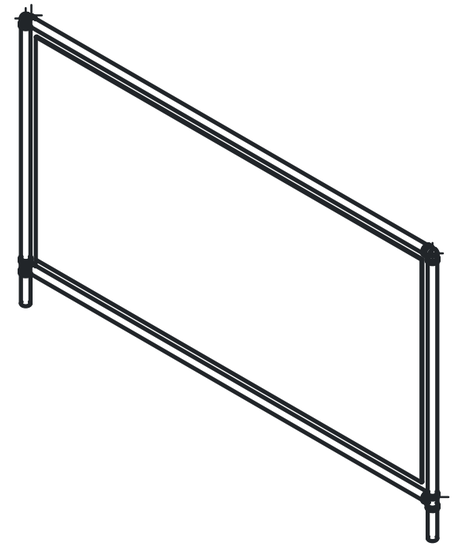

ISOMETRIC (REFERENCE, 1:30)

NOTES

1. ALL PIPE 1-1/2" SCH-40 PVC. FITTINGS SCH-40 PVC SOCKET, MODELLED AS 3000# SOCKET-WELD (ASME B16.11).
2. DIMENSIONS ARE TO FITTING CENTRELINES; THEY ARE THE SAME FOR PVC AND 3000# FITTINGS. CUT LENGTHS DIFFER (BOM).
3. 2" CLEAR BETWEEN SIGN AND PIPE OD, ALL FOUR SIDES. SIGN IS SHOWN FOR REFERENCE ONLY.
4. PVC CUT LENGTHS ASSUME A 1.00" FITTING TAKE-OUT (CL TO SOCKET BOTTOM). VERIFY ON PURCHASED FITTINGS.
5. EACH LEG IS THE OFFCUT FROM A RAIL STICK (1/8" KERF): 3 x 10 FT STICKS IN ALL, POSTS SHARE THE THIRD.
6. TEE CL TO LEG END 9 3/16" IS AS MODELLED (3000# TEE); WITH A 1.00" PVC TEE IT IS 8 15/16".
7. DIMENSION TEXT IS FIXED: RE-RUN THE DRAWING IF THE MODEL CHANGES.

Drawn:	CLAUDE
Checked:	
Approved:	
Approved:	

SIGN FRAME
1-1/2" SCH-40 PVC
ELEVATION, BOM, CUT LIST

B		SIGN-FRAME-01	0
1:16			1 OF 1